

SDL551 10W Data/Video Wireless Transceiver

- TDD OFDM full duplex wireless transceiver for video and data Link
- Up to 30Mbps Iperf Throughput @20MHz channel
- Supports Point-to-Point and Point-to-Multipoint Networks
- Interface through web browser or control uart
- 2 Ethernet and 3 channel uart data link
- Long distance wireless transceiver with 10W RF power



RS232/TTL/Sbus*3 Ethernet*2




RS232/TTL/Sbus*3 Ethernet*2

SiHid SDL551 was designed for video and data wireless transmission with two way wireless data link. This OFDM radio device works at 800MHz or 1.4GHz bands, with frequency hopping technology (FHSS) to make sure better stability signal communication.

Features:

- TDD OFDM modulation
- Supports 806~826MHz band or 1428~1468MHz band or 1420~1530MHz band
- Supports FHSS inside each band
- 1.4/3/5/10/20MHz band widths
- Maximum 30Mbps@20MHz throughput
- RF transmission maximum power: 10W(40 to 42dBm)
- Constellation: QPSK, 16QAM, 64QAM, self-adaption
- Sensitivity: -108dBm(1Mbps)
- Supports IP data transmission(2 Ethernet port)
- Supports serial data transmission(3 channel, RS232/TTL/Sbus optional)
- 1~15km(ground-to-ground), 30~150km(UAV-to-ground, optional distance grade)
- Web UI and control uart for management
- AES128 encryption
- Uplink and downlink stream control
- Networking mode: Point-to-Point, Point-to-Multipoint, Relay, and Mesh(specify)
- Movement Speed: Supports no less than 300km/h
- Compact size and light weight
- Rugged aluminum alloy housing
- Power input: 24~30V, 28V as default, maximum 2.8A@28V power current rating
- Power consumption <40W(RF Power 10W)
- Dimensions: 131.9*67.7*28mm
- Weight: 252g

Specification

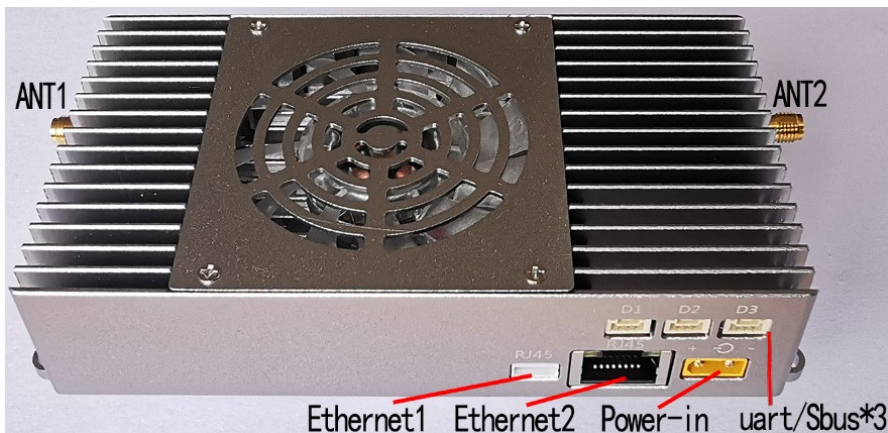


| I/O | Description |
|-----------|---|
| Ethernet1 | 4Pin ZH1.5mm connector, bridged with Ethernet2 |
| Ethernet2 | RJ45 connector, bridged with Ethernet1 |
| Uart*3 | 3Pin GH1.25mm lockable connector*3, 3 channel uart, RS232/TTL/Sbus optional |
| Power in | XT30PW-M connector |
| ANT1 | Tx/Rx Antenna port, SMA female |
| ANT2 | Rx Antenna port, SMA female |

I/O Signal

Ethernet 1

Ethernet 1 is bridged connection with Ethernet 2 on board inside the device. It's a 4PIN ZH1.5mm connector.

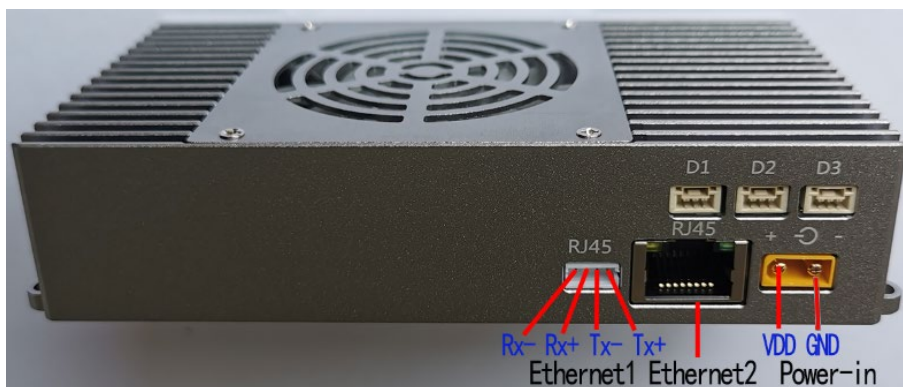

Ethernet 2

Ethernet 2 is bridged connection with Ethernet 1 on board inside the device. It's a RJ45 connector. IP camera video can be connected with SDL551 directly via Ethernet port. HDMI/SDI/AHD/AV camera video can be encoded with Sihid SE11 device and then work with SDL551 via Ethernet connection.

SE11 H265/H264 Video Encoder



Sihid SD10 H.265/H.264 video decoder device can work with SDL551 via Ethernet connection on the video received side for realtime video monitoring.



SD10 H265/H264 Video Decoder



Data uart

3Pin GH1.25mm lockable connector*3, 3 channel uart(RS232/TTL/Sbus optional).

D1 uart data is wireless transmitted via link layer protocol, D1 uart will be assembled as RS232 uart as default, it can also be assembled as TTL uart according to customers requirement.

D2 uart is wireless transmitted via IP protocol, D2 uart will be assembled as RS232 uart as default, it can also be assembled as TTL uart or Sbus port(GND/Sbus-in/Sbus-out) according to customers requirement.

D3 uart is wireless transmitted via IP protocol, D3 uart will be assembled as RS232 uart as default, it can also be assembled as TTL uart according to customers requirement. D3 uart can also be set as control uart. Baud rate of the three uart can be setup by web UI.

The three uart assembled as RS322(or TTL) uart:



The three uart assembled as 2 RS232 (or TTL) uart + 1 Sbus port:



The SDL551 system has a built-in uart to Ethernet TCP server. The D2 and D3 uart ports can use the uart to Ethernet TCP server function to achieve uart to Ethernet data conversion, and it can support both TCP and UDP protocols.



LEDs

Power LED, red light on normal powered;


Node LED, blue light for Node type indicator. Continuous light when the device worked as Control Node, blink light when the device worked as Access Node;

Link LED, wireless link working status indicator as below description:

| Link LED | Wireless link status |
|--------------|--|
| No light | This node is not connected with the wireless network. |
| Red light | This node is connected with the wireless network, the wireless link signal is weak. |
| Orange light | This node is connected with the wireless network, the wireless link signal is in middle. |
| Green light | This node is connected with the wireless network, the wireless link signal is strong. |




SDL551 device size

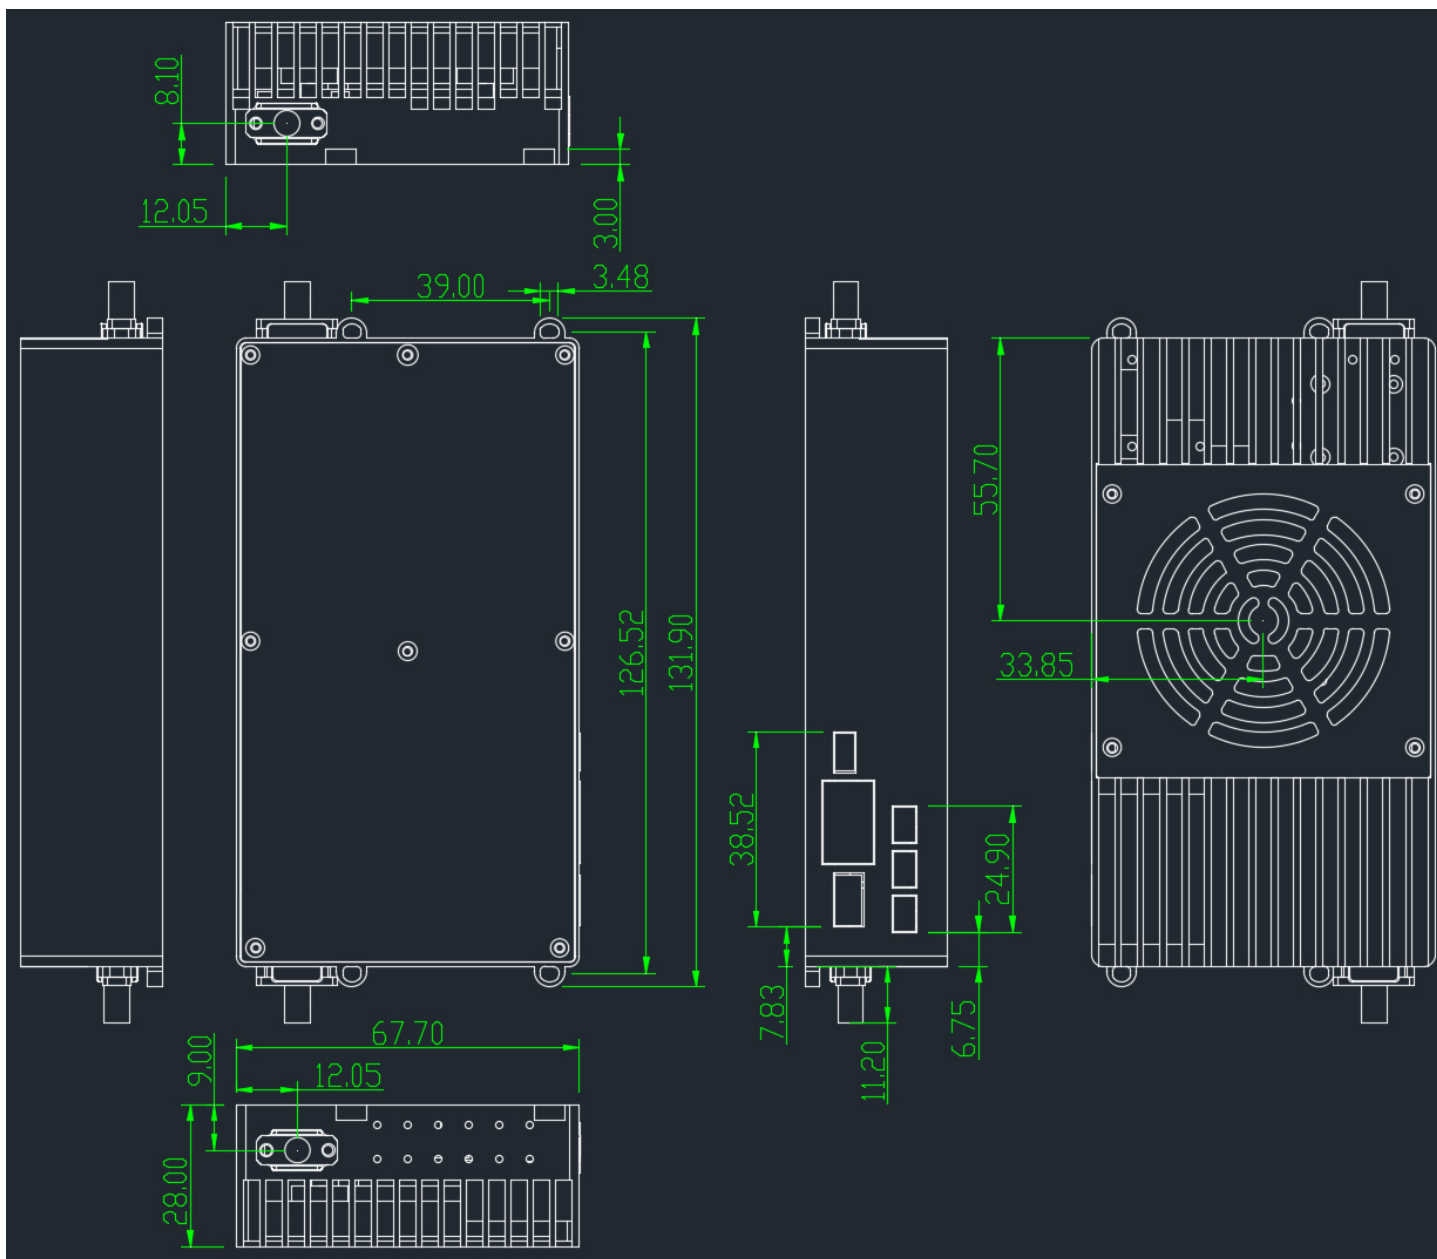


Wireless networking with SDL551

SDL551 supports two operating modes: Access Node or Central Node. It can be managed through web UI. SDL551 supports features of maximum 16 Access Nodes connected to a Central Node. All of the Nodes are in a same wireless LAN and share the whole transmission bandwidth (maximum 30Mbps@20MHz throughput). Data from Central Node to Access Node, we call downlink, and data from Access Node to Central Node, we call uplink. Uplink and downlink stream ratio can be controlled through web UI. When using SDL551 for Point-to-Point transmitting, uplink and downlink share the whole transmission bandwidth (maximum 30Mbps@20MHz throughput) too. SDL551 supports networking mode: Point -to-Point, Point-to-Multipoint, Relay, and Mesh (specify mesh version when order).


Point-to-Point transmitting

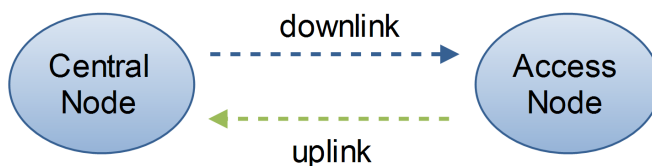

Point-to-Multipoint transmitting

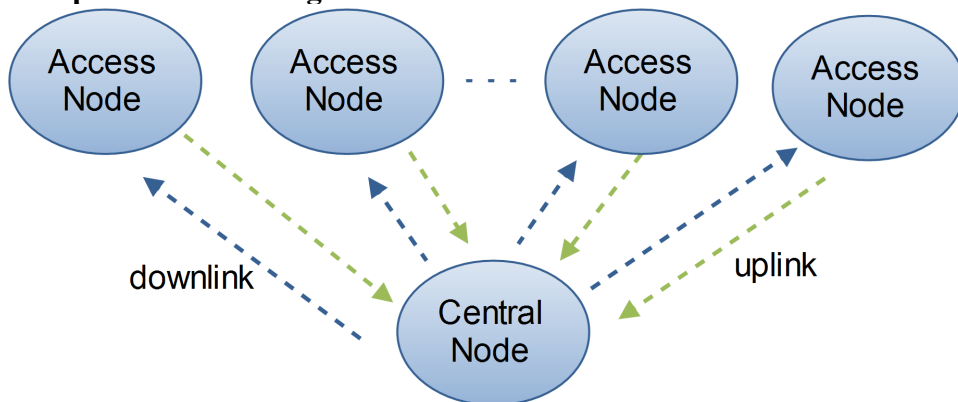

Relay transmitting

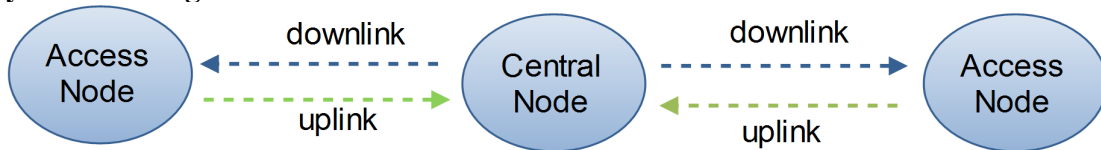

Mesh transmitting (Specify)

